




# GLENDAR 20W

## ARCHITECTURAL LIGHT SPECIFICATION SHEET

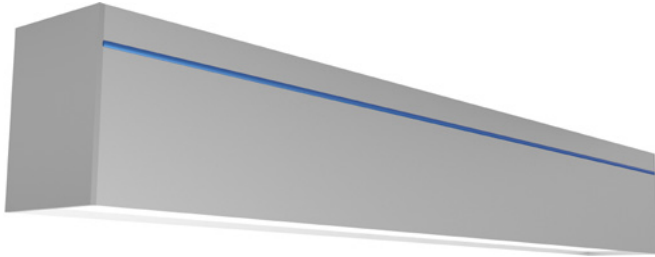

### ▼ CERTS

RoHS


CE

CB




### ▼ DIMENSIONS

3' MODULE

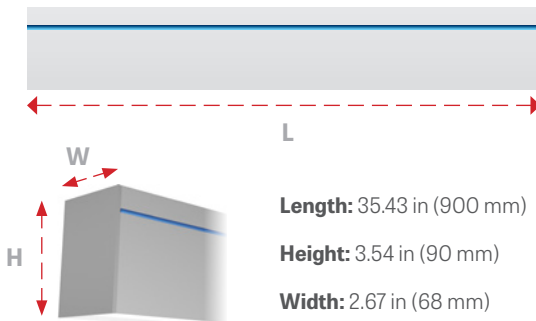

### ▼ PHOTOMETRICS



120°  
Frosted Cover

### ▶ OPTICAL SPECS

Max System Efficacy	131 Lm/W
Max Output	2,456 Lumens
CCT	30K / 35K / 40K / 45K
CRI	> 80 Ra
Beam Angle	120°

### ▶ ELECTRICAL SPECS

Input Voltage	AC 100 - 277 Volts
Power Frequency	50 / 60 Hz
Power Factor	> 0.93
Efficiency	> 92%
Dimming Function	0 - 10V
Total Harmonic Distortion	< 18%

### ▶ OTHER DETAILS

System Power Usage	20W
Ingress Protection	IP20
Luminaire Net Weight	6.374 lbs (2.891 kg)
Lifespan	≥ 50,000 Hours
Storage Temperature	-40° ~ 185°F (-40° ~ 85°C)
Operating Temperature	-20° ~ 104°F (-20° ~ 40°C)
Product Dimensions	35.43 x 3.54 x 2.67 in (900 x 90 x 68 mm)
AC Input Cable Length	2ft 7.5in (800mm)

### ▶ CONTROLS & ACCESSORIES

Options	Dimming / Linking
Mounting	Fixed surface std. (incl.) / Multi-Angle / Surface / Suspension
Suspension Cable Length	3ft 11in (1.2m) standard
Color Options	Silver RAL 7074 (standard) White RAL 9016 (MOQ 200) Black RAL 9017 (MOQ 500)
Accent Color Options	Blue RAL 5017 (standard) Red RAL 3020 (optional)

After choosing options to create the perfect controlled fixture for your space, this chart will help you create the correct SKU necessary to order.

## ARCHITECTURAL LIGHT

PRODUCT	WATTAGE	A CCT	B COVER	C FIXTURE LENGTH	D OPTIONS
GLEDAR	15W	30K / 35K / 40K / 45K	FC	2	(N/A) / D / L / LD
GLEDAR	20W	30K / 35K / 40K / 45K	FC	3	(N/A) / D / L / LD
GLEDAR	30W	30K / 35K / 40K / 45K	FC	4	(N/A) / D / L / LD
GLEDAR	40W	30K / 35K / 40K / 45K	FC	4	(N/A) / D / L / LD

Create your SKU:

GLEDAR					
PRODUCT	WATTAGE	CCT	COVER	LENGTH (FIXED)	OPTIONS
Accessory SKUs if applicable (separate by comma)					Fixture Quantity

### SKU CREATOR GUIDELINES

- Options in chart separated by slash (/)
- Choose one option per column.
- All characters must **always** utilize capitalization. No special characters (/ , & , #, etc.) will be permitted.
- White space in between columns indicates single space in SKU.

### SKU CREATOR CATEGORY KEY

To select standard fixture - leave **OPTIONS** column blank.

A CCT - COLOR TEMP.	B COVER	C FIXTURE LENGTH	D OPTIONS
<b>30K</b> - 3,000 Kelvin <b>35K</b> - 3,500 Kelvin <b>40K</b> - 4,000 Kelvin <b>45K</b> - 4,500 Kelvin	<b>FC</b> - Frosted Cover	<b>2</b> - 2 feet <b>3</b> - 3 feet <b>4</b> - 4 feet	(N/A) - Standard Body <b>D</b> - Dimmable <b>L</b> - Linkable <b>LD</b> - Linkable & Dimmable

## ACCESSORY SKUS

Order accessories as separate part number from your Fixture SKU. Learn more about these options on the Accessories Page.

SKU	DESCRIPTION
GLEDARA Cable Mount	Architectural LED Linear Fixture 1.2 Meter Cable Mount-Set of Two
GLEDARA Adj. Mount	Architectural LED Linear Fixture Adjustable Surface Mount-Set of Two
GLEDARA L Bracket	Architectural LED Linear Fixture L-Connector Bracket
GLEDARA EXT 1.5	Architectural LED Linear Fixture 1.5M Cord Extension
GLEDARA FC Black	Architectural LED Linear Fixture Body Color Black RAL 9017 (MOQ>500pcs)
GLEDARA FC White	Architectural LED Linear Fixture Body Color White RAL 9016 (MOQ>200pcs)
GLEDARA TRIM Red	Architectural LED Linear Fixture Accent Color Red RAL 3020

# FIXTURE OPTIONS

Necessary choices to configure product



## ACCESSORY OPTIONS

### ▶ SUSPENSION CABLE

SKU	PHOTO
<b>GLEDARA Cable Mount</b>	
Suspend the GLEDARA unit from the ceiling for an accented look and feel.	

### ▶ ADJUSTABLE CEILING MOUNT

SKU	PHOTO
<b>GLEDARA Adj. Mount</b>	
Ability to mount fixtures to the surface and have multiple lighting angles with the multi-angle bracket.	

### ▶ L BRACKET

SKU	PHOTO
<b>GLEDARA L BRACKET</b>	
Attach units at a 90 degree angle.	

### ▶ BLACK BODY

SKU	PHOTO
<b>GLEDARA FC BLACK</b>	
Go for a sleek, dark body to either suit a darker ceiling or accent against a lighter one.	

### ▶ WHITE BODY

SKU	PHOTO
<b>GLEDARA FC WHITE</b>	
Get a classic look with white body unit. Blend it in with a light ceiling or have it stand out against a darker one.	

### ▶ ACCENT COLORS

SKU	PHOTO
<b>GLEDARA TRIM Red</b>	
Stay with the standard blue stripe or choose the optional red to match your decor.	





# CONFIGURATION OPTIONS

THE CORRECT CONNECTIONS FOR YOUR DESIGN



## GLENDAR Configuration Options

In order to create different configuration designs, you must make sure to purchase light banks with the correct link connection ends.

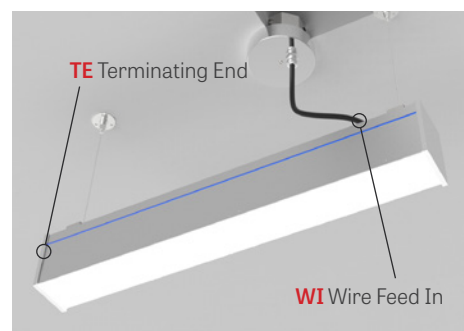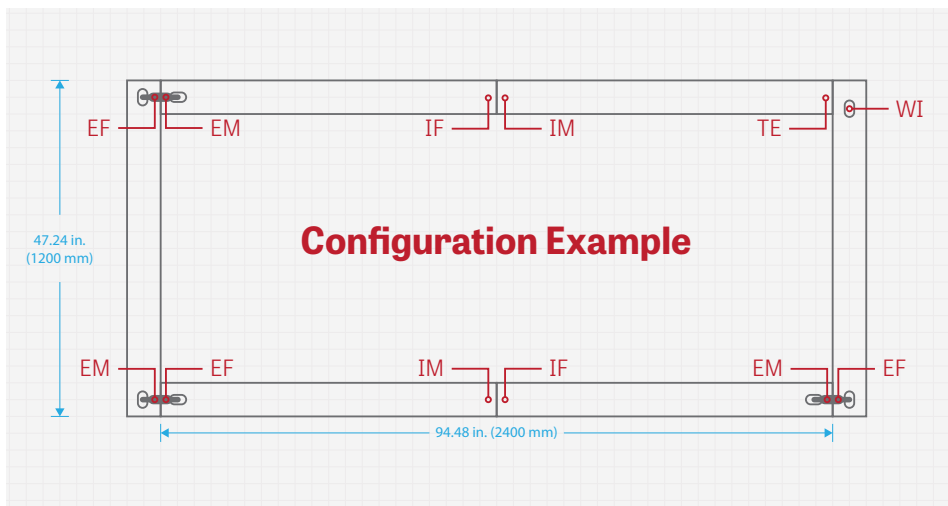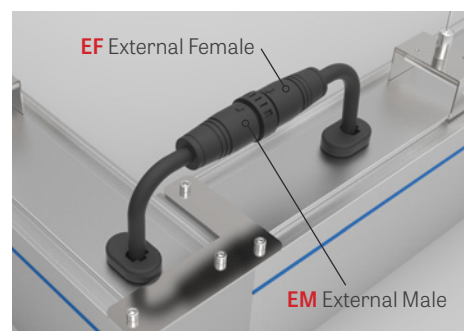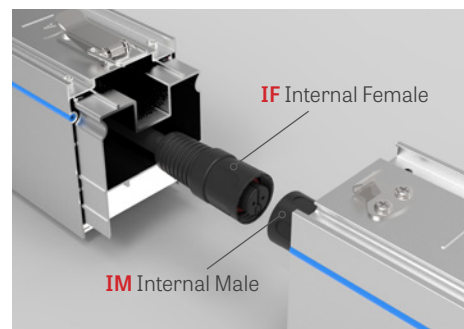

### ACCESSORY SKUS

SKU	DESCRIPTION
GLEDARA Linking WI/EF	Architectural LED Linking Configuration - Wire In/External Female
GLEDARA Linking WI/IF	Architectural LED Linking Configuration - Wire In/Internal Female
GLEDARA Linking EM/EF	Architectural LED Linking Configuration - External Male/External Female
GLEDARA Linking EM/IF	Architectural LED Linking Configuration - External Male/Internal Female
GLEDARA Linking IM/EF	Architectural LED Linking Configuration - Internal Male/External Female
GLEDARA Linking IM/IF	Architectural LED Linking Configuration - Internal Male/Internal Female
GLEDARA Linking EM/TE	Architectural LED Linking Configuration - External Male/Terminating End Cap
GLEDARA Linking IM/TE	Architectural LED Linking Configuration - Internal Male/Terminating End Cap