



GLEDWP4 40W

WALLPACK 4 LIGHT SPECIFICATION SHEET



▼ CERTS



RoHS



CB

▼ DIMENSIONS




Height: 9.252 in (235 mm)

Length: 6.535 in (166 mm)

Width: 14.173 in (360 mm)

▼ PHOTOMETRICS



Type IV (T4)
Distribution

▶ OPTICAL SPECS

System Efficacy	Up to 120 Lm/W
Lumen Output	Up to 4,862 Lumens
CCT	40K / 45K / 50K / 57K
CRI	> 70 Ra
Beam Angle	Type IV

▶ ELECTRICAL SPECS

System Power Usage	40 W
Input Voltage	AC 100 - 277 Volts
Power Frequency	50/60 Hz
Power Factor	> 0.9
Total Harmonic Distortion	< 15%

▶ OTHER DETAILS

Fixture Material	Aluminum
Ingress Protection	IP65
Luminaire Net Weight	3.1 Kg
Lifespan	≥ 50,000 Hours
Storage Temperature	-22° ~ 176°F (-30° ~ 80°C)
Storage Humidity	10 - 95%
Operating Temperature	-4° ~ 113°F (-20° ~ 45°C)
Operating Humidity	20 - 90%
Product Dimensions	14.173 x 9.252 x 6.535 in (360 x 235 x 166mm)

▶ FIXTURE OPTIONS

Intelligent Control	Integrated Photocell
Surge Protection	10 kA

▶ OPTIONS


▶ PHOTOCELL (OPTIONAL)

Sensors detect daylight, automatically turning lights ON at Dusk and OFF at dawn



▶ SURGE PROTECTION (OPTIONAL)

Our surge protection devices are perfectly adapted for outdoor lighting to provide single phase protection for line/neutral, line/ground and neutral/ground in accordance with IEEE C62.41 2002 C High.

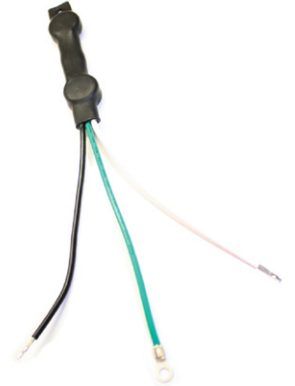

After choosing options to create the perfect fixture for your space, use this chart to create your ordering SKU.

WALLPACK 4 LIGHT

PRODUCT	WATTAGE	A	CCT	B	DISTRIBUTION TYPE	C	OPTIONS
GLEDWP4	40 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	60 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	80 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	100 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	120 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	150 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP

Create your SKU:

GLEDWP4			
PRODUCT	WATTAGE	CCT	OPTIONS
Accessory SKUs if applicable		Fixture Quantity	

SKU CREATOR GUIDELINES

- Options in chart separated by slash (/)
- Choose one option per column.
- All characters must **always** utilize capitalization. No special characters (/, &, #, etc.) will be permitted.
- White space in between columns indicates single space in SKU.

SKU CREATOR CATEGORY KEY

A	B	C
CCT - COLOR TEMPERATURE	DISTRIBUTION TYPE	OPTIONS
40K - 4,000 Kelvin 45K - 4,500 Kelvin 50K - 5,000 Kelvin 57K - 5,700 Kelvin	T4 - Type IV <i>Photometrics diagrams on specification sheets.</i>	(N/A) - Standard S - Surge protection P - Photocell SP - Surge protection and photocell