



# GLEDWP4 80W

## WALLPACK 4 LIGHT SPECIFICATION SHEET



### ▼ CERTS



RoHS



### ▼ DIMENSIONS




**Height:** 9.252 in (235 mm)

**Length:** 6.535 in (166 mm)

**Width:** 14.173 in (360 mm)

### ▼ PHOTOMETRICS



Type IV (T4)  
Distribution

### ▶ OPTICAL SPECS

System Efficacy	Up to 126 Lm/W
Lumen Output	Up to 10,007 Lumens
CCT	40K / 45K / 50K / 57K
CRI	> 70 Ra
Beam Angle	Type IV

### ▶ ELECTRICAL SPECS

System Power Usage	80W
Input Voltage	AC 100 - 277 Volts
Power Frequency	50/60 Hz
Power Factor	> 0.9
Total Harmonic Distortion	< 15%

### ▶ OTHER DETAILS


Fixture Material	Aluminum
Ingress Protection	IP65
Luminaire Net Weight	3.4 Kg
Lifespan	≥ 50,000 Hours
Storage Temperature	-22° ~ 176°F (-30° ~ 80°C)
Storage Humidity	10 - 95%
Operating Temperature	-4° ~ 113°F (-20° ~ 45°C)
Operating Humidity	20 - 90%
Product Dimensions	14.173 x 9.252 x 6.535 in (360 x 235 x 166mm)

### ▶ FIXTURE OPTIONS

Intelligent Control	Integrated Photocell
Surge Protection	10 kA

## ▶ OPTIONS

### ▶ PHOTOCELL (OPTIONAL)

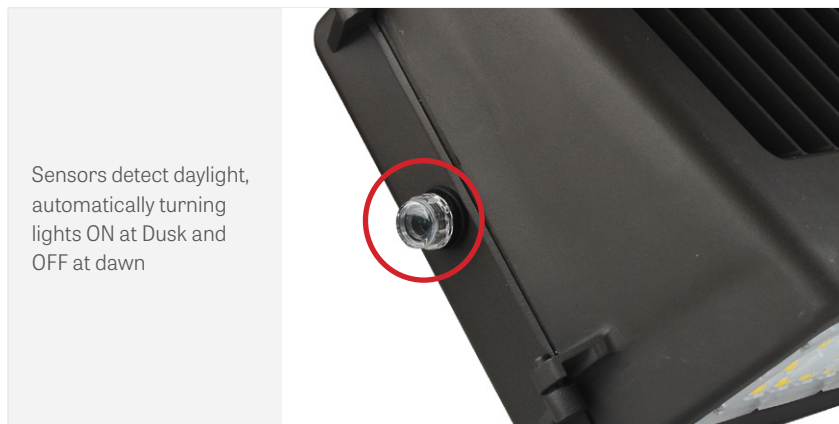

Sensors detect daylight, automatically turning lights ON at Dusk and OFF at dawn

### ▶ SURGE PROTECTION (OPTIONAL)

Our surge protection devices are perfectly adapted for outdoor lighting to provide single phase protection for line/neutral, line/ground and neutral/ground in accordance with IEEE C62.41 2002 C High.



After choosing options to create the perfect fixture for your space, use this chart to create your ordering SKU.

## WALLPACK 4 LIGHT

PRODUCT	WATTAGE	A	CCT	B	DISTRIBUTION TYPE	C	OPTIONS
GLEDWP4	40 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	60 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	80 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	100 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	120 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP
GLEDWP4	150 W		40K / 45K / 50K / 57K		T4		(N/A) / S / P / SP

Create your SKU:

<b>GLEDWP4</b>			
PRODUCT	WATTAGE	CCT	OPTIONS
Accessory SKUs if applicable		Fixture Quantity	

### SKU CREATOR GUIDELINES

- Options in chart separated by slash (/)
- Choose one option per column.
- All characters must **always** utilize capitalization. No special characters (/, &, #, etc.) will be permitted.
- White space in between columns indicates single space in SKU.

### SKU CREATOR CATEGORY KEY

A	B	C
<b>CCT - COLOR TEMPERATURE</b>	<b>DISTRIBUTION TYPE</b>	<b>OPTIONS</b>
<b>40K</b> - 4,000 Kelvin <b>45K</b> - 4,500 Kelvin <b>50K</b> - 5,000 Kelvin <b>57K</b> - 5,700 Kelvin	<b>T4</b> - Type IV  <i>Photometrics diagrams on specification sheets.</i>	(N/A) - Standard <b>S</b> - Surge protection <b>P</b> - Photocell <b>SP</b> - Surge protection and photocell