

# GLEDP-2x2-40W

## SPECIFICATIONS




### Features:


- Up to 80% Energy Savings
- No UV/IR Light
- 0-10 Volt Dimming
- No Mercury
- White or Gray Frame Options
- 5-year warranty

### Dimensions:

Length: 23.74in (603mm) Height: 23.74in (603mm) Width: 0.39in (10mm)

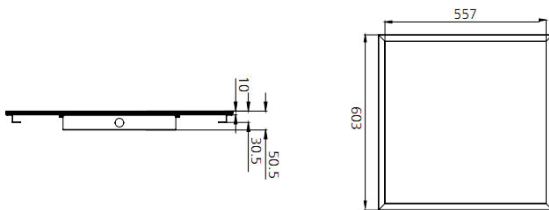

### Photometrics:

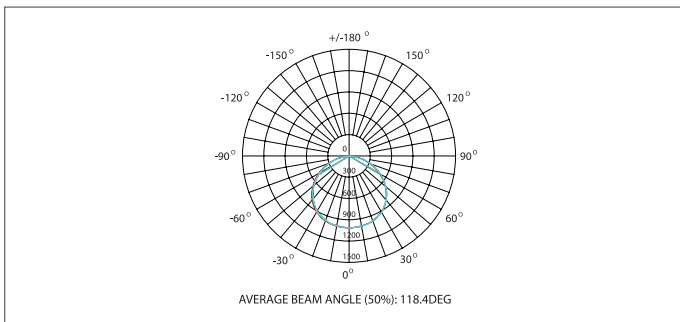

### Optical Details:

Lumen Efficacy	Up to 98 Lm/W (CCT = 5000K)
Lumen Output	3,693 Lm (CCT = 5000K)
CCT	2700K, 3000K, 4000K, 5000K
CRI	≥ 80 Ra
Beam Angle	120°

### Electrical Details:

System Power Usage	40 Watts
Input Voltage	AC 100-277 Volts
Power Frequency	50/60 Hz
Efficiency	≥ 85%
Power Factor	≥ 0.9
Total Harmonic Distortion	< 20%

### Other Details:

Ingress Protection	IP40 - Indoor use only
Fixture Material	Aluminum Alloy
Lifespan	≥ 50,000 Hours
Storage Temperature	-4°-149°F (-20-65°C)
Operating Temperature	-4°-113°F (-20-45°C)
Product Dimensions	23.74 x 23.74 x 0.39in (603 x 603 x 10mm)

### PART NUMBER KEY:

GLEDP- 2X2 - 40W - CCT  
2700K  
3000K  
4000K  
5000K

Example: GLEDP-2X2-40W-2700K