


GLEDSB2-150W

SPECIFICATIONS




Dimensions:


Length: 17.01in (432mm) Height: 6.93in (176mm) Width: 13.50in (343mm)

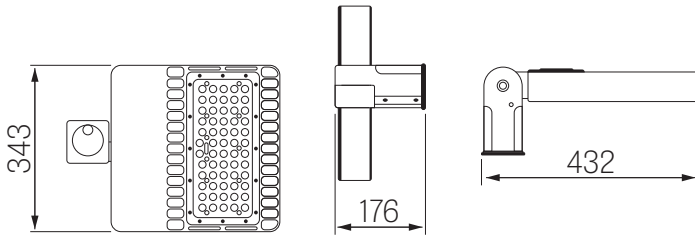


Photometrics




Type II



Type III



Type V



Type V-Short

Optical Details

System Efficacy	Up to 103.17 Lm/W (CCT=5000K)
Lumen Output	14,825 Lumens
CCT	3000K, 4000K, 5000K
Distribution Type	Type II, Type III, Type V, Type V-Short
CRI	> 70 Ra


Electrical Details

Input Voltage	AC 100-277 Volts
Power Frequency	50/60 Hz
Power Efficiency	> 90%
Power Factor	> 0.90
Total Harmonic Distortion	< 20%

Other Details

System Power Usage	143.7 Watts
Fixture Material	Aluminum
Ingress Protection	IP65 Weatherproof
Luminaire Net Weight	6.8 Kg
Lifespan	50,000 Hours
Storage Temperature	-13~149°F (-25~65°C)
Operating Temperature	-40~131°F (-40~55°C)
Product Dimensions	17.01 x 13.50 x 6.93in (432 x 343 x 176mm)

Mounting Adapters

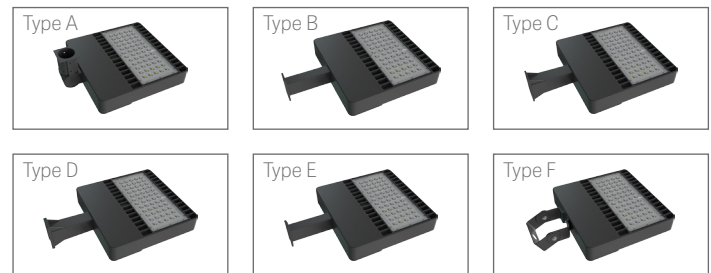

PART NUMBER KEY: [DT = Distribution Type]

GELDSB2	-	150W	-	CCT	-	DT
				3000K		II
				4000K		III
				5000K		V
						VS

Example Part Number: GLEDSB2-150W-3000K-II-A