


GLEDSB2-200W

SPECIFICATIONS




Dimensions:

Length: 26.38in (670mm) Height: 6.93in (176mm) Width: 13.50in (343mm)

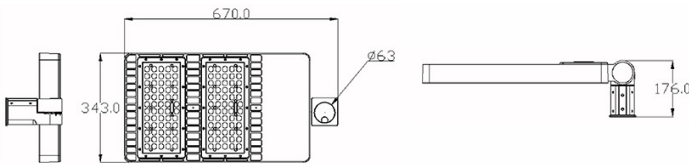

Photometrics

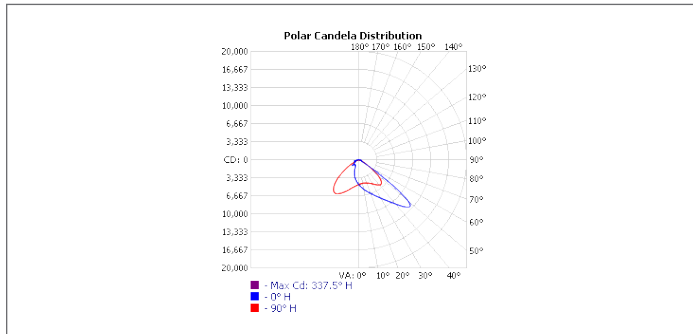

Optical Details

System Efficacy	Up to 102.43 Lm/W (CCT=5000K)
Lumen Output	20,424 Lumens
CCT	3000K, 4000K, 5000K
Distribution Type	Type II, Type III, Type V, Type V-Short
CRI	> 70 Ra


Electrical Details

Input Voltage	AC 100-277 Volts
Power Frequency	50/60 Hz
Power Efficiency	> 90%
Power Factor	> 0.90
Total Harmonic Distortion	< 20%

Other Details

System Power Usage	199.4 Watts
Fixture Material	Aluminum
Ingress Protection	IP65 Weatherproof
Luminaire Net Weight	10 Kg
Lifespan	50,000 Hours
Storage Temperature	-13~149°F (-25~65°C)
Operating Temperature	-40~131°F (-40~55°C)
Product Dimensions	26.38 x 13.50 x 6.93in (670 x 343 x 176mm)

Mounting Adapters

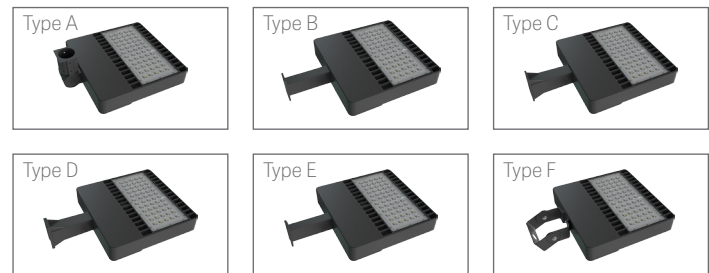

PART NUMBER KEY: [DT = Distribution Type]

GELDSB2	-	200W	-	CCT	-	DT
				3000K		II
				4000K		III
				5000K		V
						VS

Example Part Number: GLEDSB2-200W-3000K-II-A