


GLEDSB2-80W

SPECIFICATIONS




Dimensions:

Length: 14.33in (364mm) Height: 6.93in (176mm) Width: 10.83in (275mm)

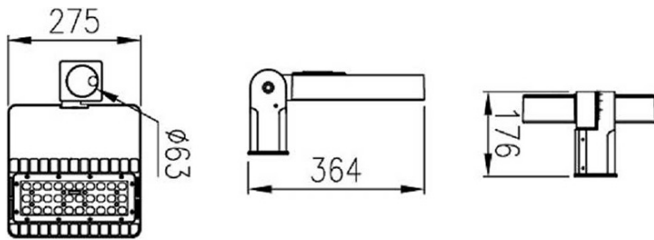

Photometrics

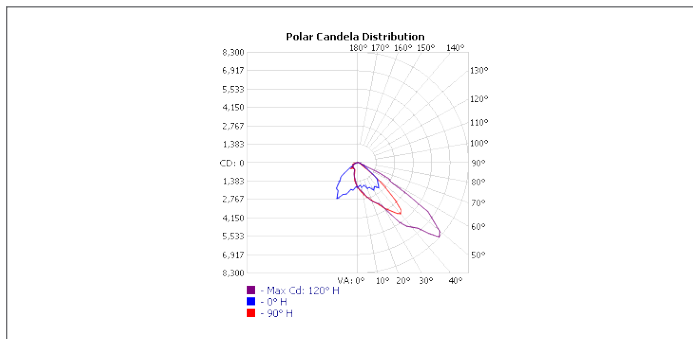

Optical Details

| | |
|-------------------|---|
| System Efficacy | Up to 106.74 Lm/W (CCT=5000K) |
| Lumen Output | 8,040 Lumens |
| CCT | 3000K, 4000K, 5000K |
| Distribution Type | Type II, Type III, Type V, Type V-Short |
| CRI | > 70 Ra |


Electrical Details

| | |
|---------------------------|------------------|
| Input Voltage | AC 100-277 Volts |
| Power Frequency | 50/60 Hz |
| Power Efficiency | > 90% |
| Power Factor | > 0.90 |
| Total Harmonic Distortion | < 20% |

Other Details

| | |
|-----------------------|--|
| System Power Usage | 75.32 Watts |
| Fixture Material | Aluminum |
| Ingress Protection | IP65 Weatherproof |
| Luminaire Net Weight | 6.8 Kg |
| Lifespan | 50,000 Hours |
| Storage Temperature | -13~149°F (-25~65°C) |
| Operating Temperature | -40~131°F (-40~55°C) |
| Product Dimensions | 14.33 x 10.83 x 6.93in (364 x 275 x 176mm) |

Mounting Adapters

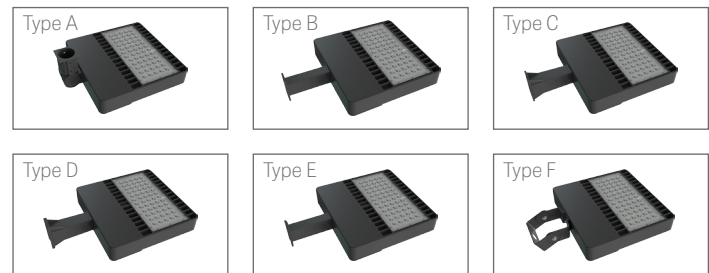

PART NUMBER KEY: [DT = Distribution Type]

| | | | | | | |
|---------|---|------|---|-------|---|-----|
| GELDSB2 | - | 150W | - | CCT | - | DT |
| | | | | 3000K | | II |
| | | | | 4000K | | III |
| | | | | 5000K | | V |
| | | | | | | VS |

Example Part Number: GLEDSB2-150W-3000K-II-A